



Features & Benefits









1. High performance and reputable brand led chips and driver
2. Clear polycarbonate lens with no risk of lamp breaking for safe industry applications
3. Optimized aluminum alloy housing design for superior thermal management
4. Instant light up with no warm up time
5. No cool down needed before restart
6. High mechanical impact resistance and ingress protection rating
7. High power UFO high bay in 400-960W and apply to the distribution center

Options

1. DALI
2. 1-10V Dimming
3. 10/25/45/60/90° degree lens
4. Adjustable mounting bracket

BE Series high bay light


Dimensions

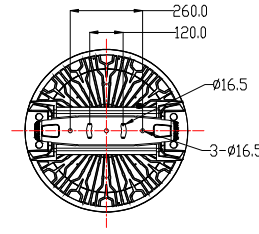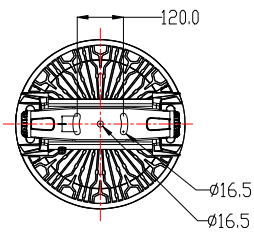


400/480W

800/960W


Photometry

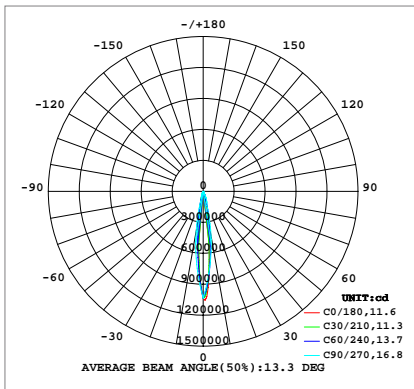


10°

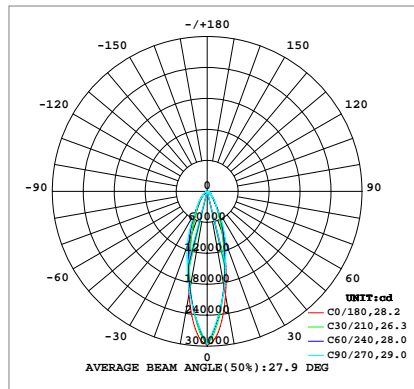


25°

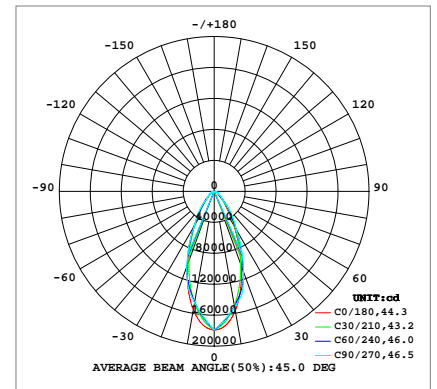

45°

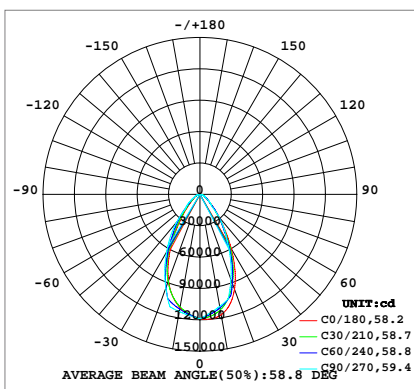

60°

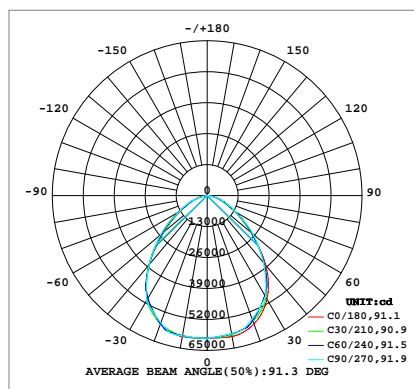

90°

Specifications

- Power Consumption: 400-960W
- Luminous Flux: 52,000lm to 134,400lm
- Input Voltage: 100-277V~
- Color Temperature: 2700 - 6500K
- IP and IK Rating: IP66 and IK08
- Colour Rendering Index (Ra): 70/80+
- L70 lumen maintenance: >50, 000 hours
- Power factor: >0.95
- Warranty: 5/7 years
- Operation Temperature Range: -30°C to+50°C

Ordering Information

| Part No | Power | CCT | Flux | Dimming | Diameter | Height | Beam Angle |
|-----------|-------|------------|-------------------|----------------|----------|--------|-----------------|
| MK-BE-400 | 400W | 2700-6500K | 52,000-56,000lm | Option dimming | 439mm | 421mm | 10/25/45/60/90° |
| MK-BE-480 | 480W | 2700-6500K | 62,400-67,200lm | Option dimming | 439mm | 421mm | 10/25/45/60/90° |
| MK-BE-800 | 800W | 2700-6500K | 104,000-112,000lm | Option dimming | 651mm | 511mm | 10/25/45/60/90° |
| MK-BE-960 | 960W | 2700-6500K | 124,800-134,400lm | Option dimming | 651mm | 511mm | 10/25/45/60/90° |

| Model | Carton Size | N.W | G.W | QTY |
|-----------|---------------|--------|--------|------|
| MK-BE-400 | 493*439*421mm | 13.5KG | 14.5KG | 1PCS |
| MK-BE-480 | 493*439*421mm | 13.5KG | 14.5KG | 1PCS |
| MK-BE-800 | 651*586*511mm | 26KG | 27KG | 1PCS |
| MK-BE-960 | 700*650*600mm | 26KG | 27KG | 1PCS |

Email: info@mklights.com